


CODE: **AWO 232**
 NAME: **7/TRZ40/PAR/IT**

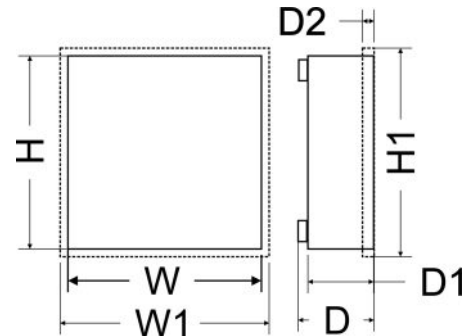

DESTINATION

PARADOX

CONTROL PANELS: MAGELLAN: MG 5000, MG RPT1

ESPRIT: 728, 728Ex, 738, 738Ex, 748, 748Ex,

SPECTRA (*): (1727, 1725Ex, 1728Ex, 1738Ex, 1759MG, 1748Es, **SP5500, SP6000, SP7000**)

+ (8x ZX4 or 4x ZX8 or 1x APR3-xxx)

DIGIPLEX/EVO (*): (DGP48, DGP96, **EVO48, EVO192**) + (6x ZX4 or 3x ZX4 or 1x APR3-xxx)

SPECTRA (**): (1727, 1725Ex, 1728Ex, 1738Ex, 1759MG, 1748Es, **SP5500, SP6000, SP7000**)

+ (4x ZX4 or 2x ZX8 or 1x APR3-xxx)

DIGIPLEX/EVO (**): (DGP48, DGP96, **EVO48, EVO192**) + (4x ZX4 or 2x ZX8 or 1x APR3-xxx)

TECHNICAL DATA

Dimensions:	W=320, H=300, D=98, W1=325, H1=305, D1=90mm, D2=14 [mm, +/-2]
Weight netto/brutto:	3,60 / 3,70 [kg]
Battery space:	(*)7Ah/12V, (*)17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRZ 40VA/16V/18V
Power supply:	230V/AC (-15%/+10%), 50+60Hz, 235mA (max.)
Power supply output:	U1=16V/AC U2=18V/AC (-5%, +15%), I1=2,2A I2=2,0A (max.)
Operating environment:	class II , -10°C+ 40°C
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, RAL 9003,
Certification, declaration:	CE, RoHS