




# Inferno X

## Sound Barrier

Inferno X can function as a Sound Barrier or as a traditional siren. Inferno X effectively stops intruders in their tracks by generating a patented unbearable pattern, frequency and intensity noise. It is designed for unbearable sound in large areas up to 800 square meters/ 8600 square feet.

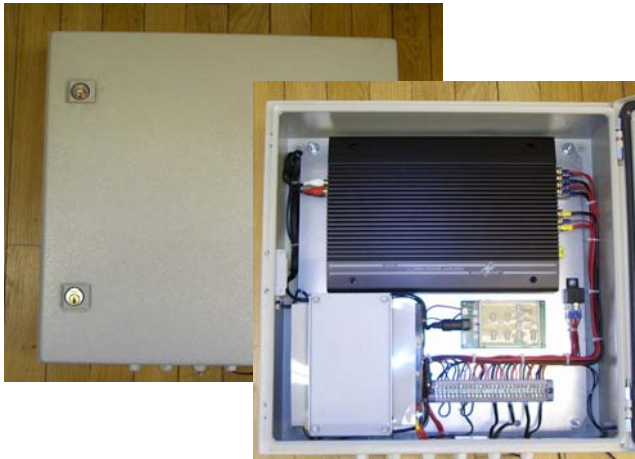

- **Generates an unbearable sound**
- **Works with all makes and types of alarm systems**
- **IP65 classed key locked industrial case for installation in harsh environments**
- **Sabotage protected with battery backup**

Installation of the Inferno X cheats the intruder of the few minutes that could be used between alarm activation and arrival of security or police, protecting the secured areas for that crucial period of time and continuing for the duration of continuous signal.

As a Sound Barrier, Inferno X causes a person to immediately modify their behavior, typically observed as autonomic protective impetus to place ones hands on their ears followed by body motion to immediately remove oneself from the intensity zone.

It is as a behavior modifying Sound Barrier that the value of the patented frequency pattern is achieved. It can be applied to quell, repel or control aggressive, malicious and riot behaviors. This aspect has been applied for protecting Russian nuclear weapons, stores, offices, and distribution plants.

As a siren, Inferno X is unmistakably loud with a unique intolerable attention getting frequency pattern that clearly stands out from background noise.

Inferno X has built-in sabotage protection and a battery. The outer casing is made of steel which makes it sturdy and durable.

Inferno X is easily retrofitted to significantly upgrade the effectiveness of existing security systems.

Protective volume	Directional or to protect a volume from 400 to 1800 cubic meters/14000 to 75000 cubic feet
Dimensions	L and W = 500 mm/19.69 in D = 210 mm/8.27 in
Weight	30 kg/ 66 lb, separate horn speakers
Frequency range	2 - 5 kHz
Acoustic effect	>125 ±1 dB(A) @ 1 m/3.28 ft
Battery backup	27Ah, Pbg
Battery lifetime	3 years
Power consumption	12 V DC, < 10 mA
Function time at cont. signal	> 20 minutes
Standby without charge	Up to 6 month
IP Class	IP 65
Temperature range	-10 — +60 (C), 14 — 140 (F)