

CAMERA ACCESSORIES


Housing & Mount for PTZ Dome Camera



	STH-380PO (Outdoor Housing)	STH-370PO/PI (Outdoor/Indoor Housing)	STH-360PO (Outdoor Housing)	STH-370PE (In-Ceiling Housing)	STB-370PC (Ceiling Mount)	STB-270B (Wall Setup Box)
Operating Temperature	-40°C ~ +50°C (-40°F ~ +122°F)	-20°C ~ +50°C (-4°F ~ +122°F)	-20°C ~ +50°C (-4°F ~ +122°F)	-10°C ~ +50°C (14°F ~ +122°F)	-20°C ~ +50°C (-4°F ~ +122°F)	-20°C ~ +50°C (-4°F ~ +122°F)
Operating Humidity	0 to 90% RH	0 to 90% RH (non-condensing)	0 to 90% RH	0 to 90% RH (non-condensing)	0 to 90% RH	0 to 90% RH
Materials	Housing	ALDC 12	ALDC 12	ALDC 12	EGI 1.2T	ALDC 12
	Ring	ALDC 12	ALDC 12	ALDC 12	ABS	N/A
	Dome	Poly Carbonate	Poly Carbonate	Poly Carbonate	N/A	N/A
Antivibration / Waterproof	IP67	IP67	IP66	N/A	N/A	IP66
Dimensions (WxHxD)	External	Ø253.49 x 285.8mm (Ø9.98" x 11.25")	Ø253.49 x 285.8mm (Ø9.98" x 11.25")	Ø244 x 295.4mm (Ø9.61" x 11.63")	Ø164 x 41mm (Ø6.45" x 1.61")	182 x 218 x 92.5mm (7.17" x 8.58" x 3.64")
	Internal	Ø206.15 x 168.4mm (Ø8.12" x 6.63")	Ø206.15 x 168.4mm (Ø8.12" x 6.63")	Ø200 x 167.5mm (Ø7.87" x 6.59")	Ø188 x 183mm (Ø7.4" x 7.2")	
Weight	3.2Kg (7.05 lb)	3.2Kg (7.05 lb)	2.08Kg (4.59 lb)	740g (1.63 lb)	1.3Kg (2.87 lb)	2.98Kg (6.57 lb)
Input Voltage	24V AC	24V AC	24V AC	N/A	N/A	N/A
Power Consumption	Max. 49W	Max. 34W (STH-370PO)	Max. 34W	N/A	N/A	N/A

Dimensions

Unit : mm (inch)

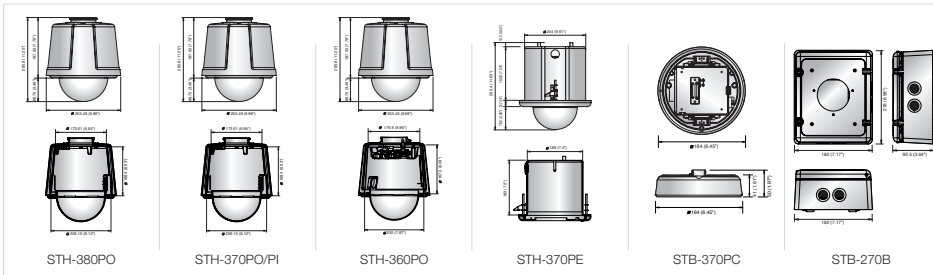

FIRST PRINT 9-2009

CAMERA ACCESSORIES


Mount for PTZ Dome Camera



	STB-270PWV (Wall Mount)	STB-496PPV (Pendant Mount)	STB-300PP (Pendant Mount)	STB-300PW (Wall Mount)	STB-40PF (Flange)	STB-30PF (Ceiling Flange)	STB-25PF (Flange)
Operating Humidity	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH	0 to 90% RH	0 to 90% RH	0 to 90% RH
Materials	Housing	ALDC 12	ALDC 12	ALDC 12	ALDC 12	ALDC 12	ALDC 12
	Ring	EGI 1.2T	SPPS 32A / SCH 40	N/A	N/A	EGI 1.2T	EGI 1.2T
	Dome	N/A	SPCC	N/A	N/A	N/A	N/A
Antivibration / Waterproof	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Dimensions (WxHxD)	270 x 175 x 140mm (10.63" x 6.89" x 5.51")	150 x 496mm (5.91" x 19.53")	150 x 178 x 62.5mm (5.91" x 7.01" x 2.46")	150 x 178 x 155mm (5.91" x 7.01" x 6.1")	Ø63.8 x 82mm (Ø2.51" x 3.23")	Ø126 x 67mm (Ø4.96" x 2.64")	Ø170 x 34.5mm (Ø6.7" x 1.36")
Weight	1.2Kg (2.65 lb)	1.8Kg (3.97 lb)	540g (1.19 lb)	750g (1.65 lb)	160g (0.35 lb)	380g (0.84 lb)	410g (0.9 lb)

Dimensions

Unit : mm (inch)

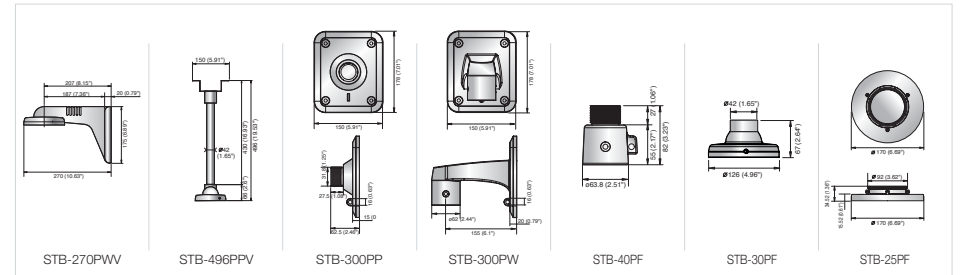

REVISED 10-2009

CAMERA ACCESSORIES


Mount & Housing for PTZ Dome Camera



	STB-330PPM (Pole Mount)	STB-340PCM (Corner Mount)	STB-350PPM (Parapet Mount)	STB-230PW (Wall Mount)	STB-280PW (Wall Mount)	STH-1000PI (Indoor Housing)	STH-1000PO (Outdoor Housing)	
Operating Humidity	0 to 90% RH	0 to 90% RH	0 to 90% RH	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing) Operating Temperature :-10°C ~ +50°C(+14°F ~ +122°F)	0 to 90% RH (non-condensing) Operating Temperature :-10°C ~ +50°C(+14°F ~ +122°F)	
Materials	Housing	SPCC	SPCC	SUS	ALDC 12	ALDC 12	PC	
	Ring	N/A	N/A	N/A	N/A	N/A	N/A	
	Dome	N/A	N/A	N/A	N/A	N/A	Poly Carbonate	
Antivibration / Waterproof	N/A	N/A	N/A	N/A	N/A	N/A	IP66	
Dimensions (WxHxD)	External	155 x 185 x 50mm	297 x 185 x 192mm	680 x 920mm	175.4 x 214 x 247.2mm	175.4 x 238 x 278.2mm	Ø169 x 150.4mm	Ø242 x 284.5mm(Ø9.53" x 11.2")
	Internal	(6.1" x 7.28" x 1.97")	(11.69" x 7.28" x 7.56")	(26.77" x 36.22")	(6.91" x 8.43" x 9.73")	(6.91" x 9.37" x 10.95")	(6.665" x 5.92")	Ø200 x 167.5mm(Ø7.87" x 6.59")
Weight	600g (1.32 lb)	1.3Kg (2.87 lb)	8Kg (17.64 lb)	656g (1.45 lb)	980g (2.16 lb)	200g (0.44 lb)	3.02Kg (6.66 lb)	
Power Consumption	N/A	N/A	N/A	N/A	N/A	N/A	Max. 34W	

Dimensions

Unit : mm (inch)

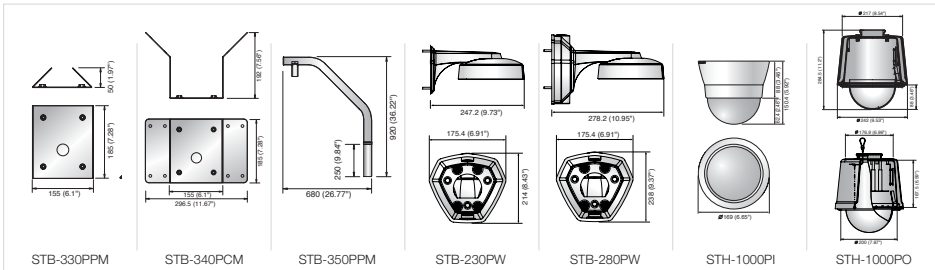

CAMERA ACCESSORIES


Mount for Vandal-Resistant Dome Camera



	STB-319VPS/319VPW (Indoor Pendant Mount)	STB-249VWS/249VPW (Indoor Wall Mount)	STB-250VC/250VCW (Indoor Corner Mount)	STB-225VWS/225VW (Outdoor Wall Mount)	STB-275VWS/275VW (Outdoor Wall Mount)
Operating Humidity	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)
Materials	AL/SPPS/SPCC	AL/SPPS/SPCC	SPCC	AL	AL
Antivibration / Waterproof	N/A	N/A	N/A	N/A	N/A
Dimensions (WxHxD)	Ø154 x 319mm (Ø6.06" x 12.56")	Ø154 x 249mm (Ø6.06" x 9.8")	239.4 x 215 x 40.82mm (9.43" x 8.46" x 1.61")	172.9 x 154.4 x 210.8mm (6.81" x 6.08" x 8.3")	172.9 x 154.4 x 252.3mm (6.81" x 6.08" x 9.93")
	Weight	650g (1.43 lb)	950g (2.09 lb)	471g (1.04 lb)	800g (1.76 lb)

Dimensions

Unit : mm (inch)

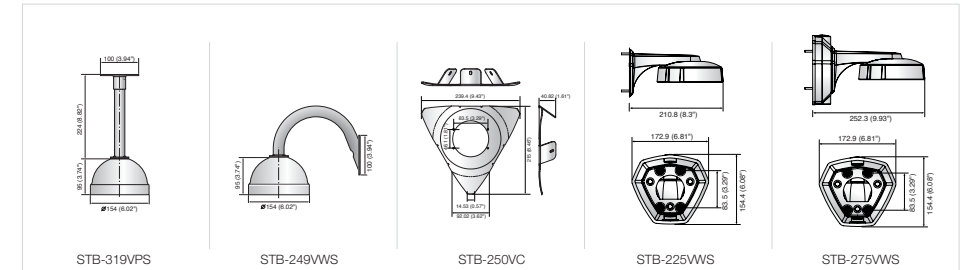


CAMERA ACCESSORIES

		Housing for Fixed Camera				Mount for Fixed Camera	
		STH-600/600H (Indoor/Outdoor Housing)	STB-500/500H (Indoor/Outdoor Housing)	STH-350 (Indoor Housing)	STH-200 (Indoor Housing)	STB-4150V (Wall Mount)	STB-400 (Wall Mount)
Operating Temperature		-10°C ~ +50°C / -20°C ~ +50°C (+14°F ~ +122°F) / (-4°F ~ +122°F)	-10°C ~ +50°C / -40°C ~ +50°C (+14°F ~ +122°F) / (-40°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	N/A	N/A
Operating Humidity		0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)	0 to 90% RH (non-condensing)
Materials		AL	AL	ABS	AL	AL	AL
Antivibration / Waterproof		IP66 (STH-600H)	IP66 (STH-500H)	N/A	N/A	N/A	N/A
Dimensions (WxHxD)	External	232 x 149 x 626mm (9.13" x 5.87" x 24.65")	144 x 100 x 500mm (5.67" x 3.94" x 19.69")	171 x 109 x 470mm (6.73" x 4.29" x 18.5")	118 x 92 x 405mm (4.65" x 3.62" x 15.94")	Ø80 x 155.4mm	89 x 108 x 366mm
	Internal	110 x 82 x 450mm (STH-600) (4.33" x 3.23" x 17.72") 110 x 82 x 350mm (STH-600H) (4.33" x 3.23" x 13.78")	88 x 68 x 383mm (STH-500) (3.46" x 2.68" x 15.08") 88 x 68 x 290mm (STH-500H) (3.46" x 2.68" x 11.02")	100 x 82 x 304mm (3.94" x 3.23" x 11.97")	70 x 56 x 360mm (2.76" x 2.2" x 14.17")	Ø80 x 155.4mm (Ø3.15" x 6.12")	89 x 108 x 366mm (3.5" x 4.25" x 14.41")
Weight		4Kg (8.82 lb)	1.5Kg (3.31 lb)	1.3Kg (2.87 lb)	1Kg (2.2 lb)	400g (0.88 lb)	1Kg (2.21 lb)
Input Voltage		220V AC (STH-600H)	220V AC (STH-500H)	N/A	N/A	N/A	N/A
Power Consumption		Max. 66W (STH-600H)	Max. 63.1W (STH-500H)	N/A	N/A	N/A	N/A

Dimensions


Unit : mm (inch)

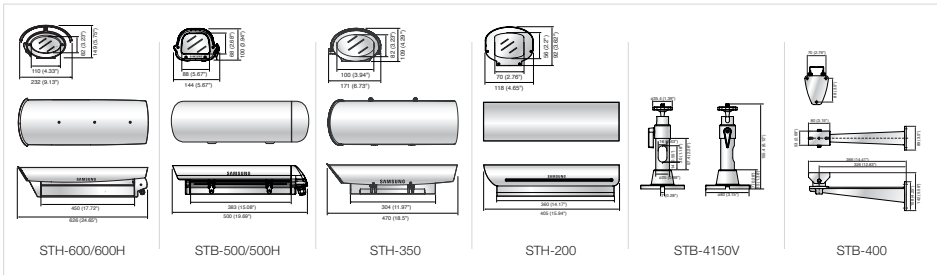

CAMERA ACCESSORIES


Wall Mount

- SPD series : STB-270PWV + PTZ Dome Housing + SPD PTZ Camera
- SPU series : STB-300PW + SPU PTZ Camera

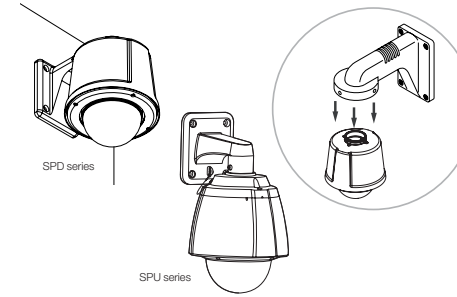


Pole Mount

- SPD series : STB-330PPM + STB-270PWV + PTZ Dome Housing + SPD PTZ Camera
- SPU series : STB-330PPM + STB-300PW + SPU PTZ Camera

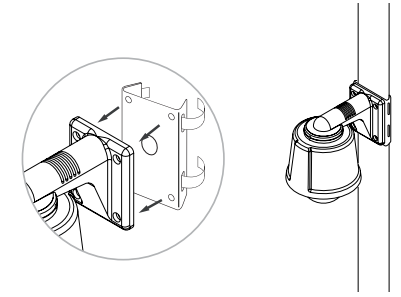


Parapet Mount

- SPD series : STB-350PPM + STB-30PF + PTZ Dome Housing + SPD PTZ Camera
- SPU series : STB-355PPM + SPU PTZ Camera

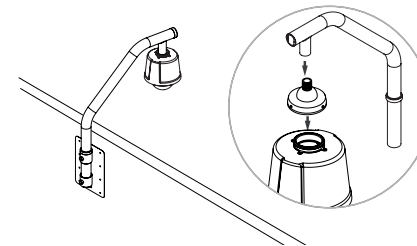


Corner Mount

- SPD series : STB-340PCM + STB-270PWV + PTZ Dome Housing + SPD PTZ Camera
- SPU series : STB-340PCM + STB-300PW + SPU PTZ Camera

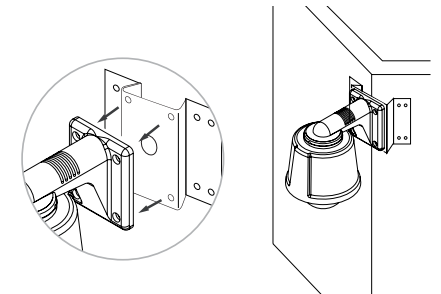


Flange

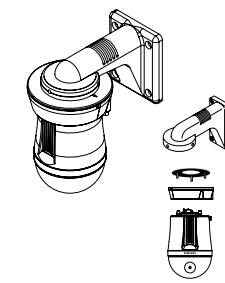


STB-270PWV + STB-25PF + STB-370PC + SPD PTZ Camera


Pendant Mount

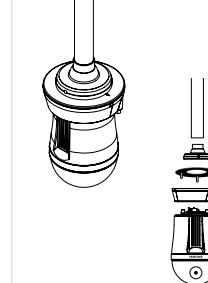

STB-30PF + STB-25PF + STB-370PC + SPD PTZ Camera

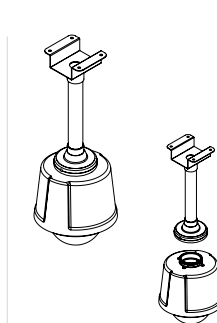

STB-496PPV (STB-30PF included) + PTZ Dome Housing + SPD PTZ Camera

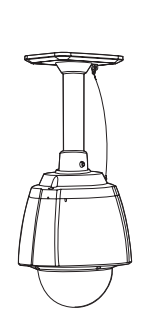

STB-300PP (STB-40PF included) + SPU PTZ Camera